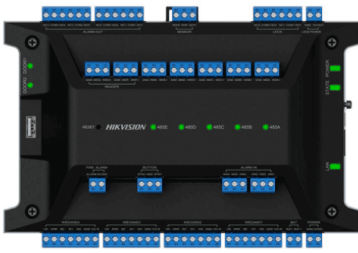

DS-K2702X(P) - Controladora Hikvision. Admite control de 2 puertas



SKU: DS-K2702X(P)

Link: <https://www.mundicam.com/productos/control-accesos/controles-acceso/controladoras/ds-k2702xp/>

PRODUCT INFORMATION

Marcas: 2344

Categorías: ACCESOS, Controladoras

Etiquetas: HIKVISION

Admite control de 2 puertas. Puede ampliarse hasta 62 módulos de acceso DS-K2M002X y se pueden controlar hasta 126 puertas. Diseño de cableado redundante RS-485 de enlace descendente para garantizar la estabilidad de la comunicación. La interfaz RS-485 de enlace descendente de 5 canales admite dos aplicaciones: 1. Cuando se utiliza una comunicación RS-485 de 4 canales, el quinto RS-485 se puede utilizar como una aplicación redundante; 2. El RS-485 de 4 canales forma 2 grupos de bucles de bus dual con aislamiento físico. Se recomienda que no tenga más de 16 módulos de acceso conectados a cada bus de bucle. Gestión de configuración web. Todas las configuraciones se pueden realizar a través de la web sin necesidad de una aplicación de software. Admite aplicaciones de control de acceso profesional, como enclavamiento de múltiples puertas y anti-passback. Admite acceso a batería de respaldo. Se pueden cargar y descargar. Tiene indicadores de estado como suministro de energía, comunicación y operación, lo que es conveniente para la detección del estado del equipo.

ESPECIFICACIONES TÉCNICAS

System

Operating systemLinux

Network

Wired network1, 10/100/1000 Mbps self-adaptive

Interface

Network interface 1

Lock control 2

Exit button 2

Door contact input 2

Alarm input 4

Alarm output 4

TAMPER 1

RS-4857, 2 for card reader, 5 for access modules (4 for communication, each interface can connect up to 16 access modules; 1 for redundancy)

Wiegand 4, standard 26/34 input, supports custom Wiegand settings

USB1, USB 2.0

Fire interface 1

Capacity

User capacity 100,000

Fingerprint capacity 10,000

Card capacity200,000

Event capacity600,000

Linked door capacity Self: 2 doors Extended: up to 126 doors (connected with 62 access modules)

Linked card reader capacity 4 RS-485 card readers (OSDP protocol) and 4 Wiegand card readers

Authentication

Fingerprint recognition duration? 1 s

General

Indicator 10 indicators, 1 for indicating power status, 1 for running status, 1 for wired network status, 5 for RS-485 status, and 2 for door status

Battery Charge and discharge

Power supply 12 ± 15% VDC

Power consumption? 72 W

Working temperature -10 °C to 55 °C (14 °F to 131 ° F)

Working humidity 0% to 90% (No condensing)

Installation Installation with guide rail

Language English, Thai, Traditional Chinese, Indonesian, Vietnamese, Arabic, Spanish (Europe), Spanish (South America), Italian, French, Dutch, Russian, Ukrainian, Portuguese (Europe), Portuguese (Brazil), Serbian, Croatian, Bulgarian, German, Greek, Romanian

Function

Configuration via Web browserSupport

Multi-factor authenticationSupport

First person inSupport

Anti-passbackSupport 32 routes (64 card readers each)

Multi-door interlockingSupport 32 groups (32 doors each)